




AÇI ve HAREKET ANALİZİ ANGLE and MOTION ANALYSIS

MODEL	X	X2	FT1(N)	FT2(N)	FB1(N)	FB2(N)
2102 Y	42,5	78,5	1500	950	1250	800
2103 Y	12	50	2600	1600	2050	1500
2105 Y	66,3	133,3	3400	2300	3050	2100

Ac: 6Bar basınçta çift hareket için hava tüketim miktarıdır.
(Ac: Air Consumption per double stroke in dm³ at 6 Bar)³

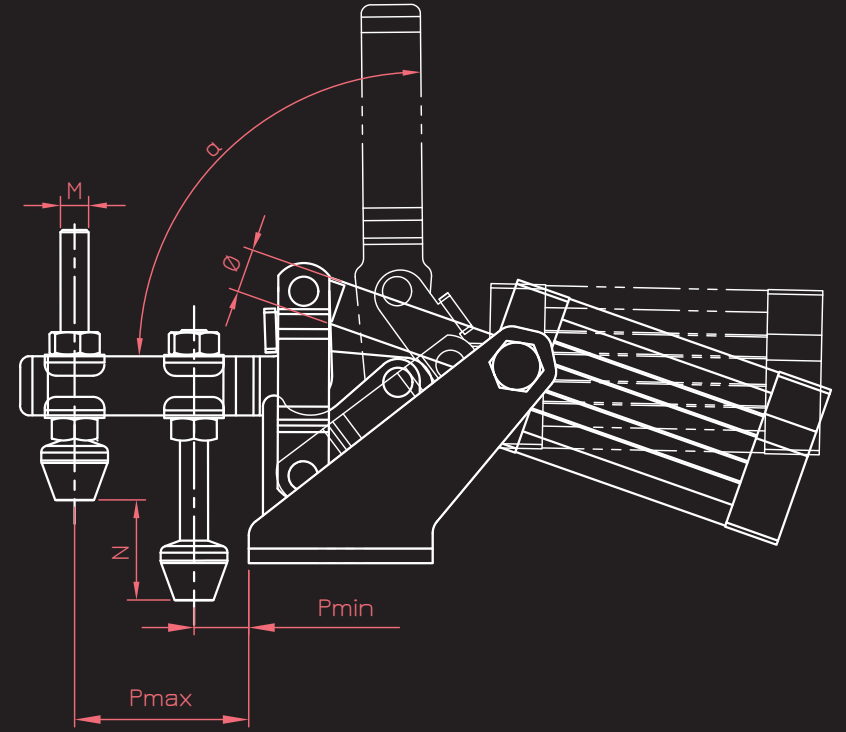

KUVVET ANALİZİ FORCE ANALYSIS

MODEL	$\alpha (\pm 2^\circ)$	N	Pmin	Pmax	Bar	Ac(dm ³)	Ø (Piston Çapı)	AĞIRLIK (Kg) (Weight)
2102 Y	102°	27,5	13,5	48,5	6	0,25	12	0,52
2103 Y	107°	26	12,5	45	6	0,51	12	0,87
2105 Y	135°	34	19	86	6	1,04	16	1,7

FT1-FT2: TUTMA KAPASİTESİ (HOLDING CAPACITY), FB1-FB2: BASKI KUVVETİ (CLAMPING FORCE),
FU: UYGULAMA KUVVETİ (APPLIED FORCE)

Boyutlar ve teknik bilgiler önceden bildirilmeksizin değiştirilebilir.
Dimensions and technical information are subject to change without notice

